




TMT LEDs USA LLC  
Irving, Texas 75063 USA  
info@tmtledsusa.com  
www.tmtledsusa.com

Datasheet  
Game Player  
**TDS-Slim**



## Slim LED Module

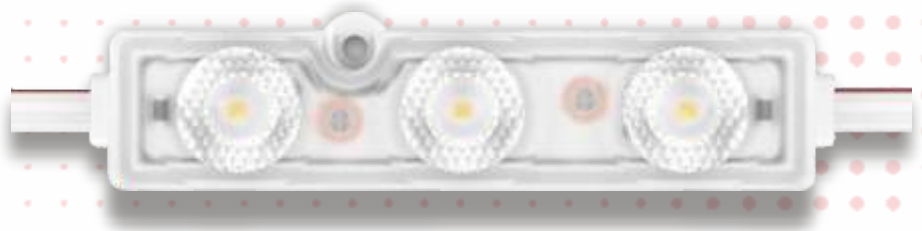

### Description

The TMT LEDs Silver Series Slim LED module is designed to compete with and outperform other 3 diode economy modules in the market. The efficient design and CrystaLens optics deliver better light dispersion over large areas, requiring fewer modules per sign. Available in .72 Watt and 1.08 Watt.

### Features

- 70-120 lumens per module
- IP 67 rated
- Up to 115 lumens per watt
- Color options available
- Reliable and economical solution

### Applications

- Ideal for 3" – 9" deep channel letter
- Sign cabinets





**TMT LEDs USA LLC**  
 Irving, Texas 75063 USA  
 info@tmtledsusa.com  
 www.tmtledsusa.com

# Datasheet Game Player TDS-Slim



Operating Temperature	<b>-40°F ~ +140°F</b>	Lead Wire	<b>Tin Coated Copper Wire</b>
Storage Temperature	<b>-40°F ~ +140°F</b>	Lifetime TM21	<b>&gt;60.000 Hours</b>
Body Material	<b>Case: ABS   Optics: Optical PC</b>	Adhesive Tape	<b>Orafol Foam</b>
Finishing	<b>Ultrasonic Welding</b>	Strip Size	<b>50 Modules/Strip</b>

**CONSTANT VOLTAGE      12V DC      5 SDCM      160° BEAM ANGLE**

	Slim			Slim HO			Slim Colors		
<b>Power</b>	<b>0.72W</b>			<b>1.08W</b>			<b>0.72W</b>		
<b>Current</b>	67 mA			100 mA			60 mA		
<b>Modules Per Foot</b>	1.6			1.6			1.6		
<b>60W PS Load</b>	75 Mods / 25 Single			50 Mods / 20 Single			75 Mods / 25 Single		
<b>Color</b>	<b>Order Code</b>	<b>Lumens</b>	<b>Lm/W</b>	<b>Order Code</b>	<b>Lumens</b>	<b>Lm/W</b>	<b>Order Code</b>	<b>Lumens</b>	<b>Lm/W</b>
<b>10.000K</b>	104239	83	102	103554	119	99	105694	23	32
<b>6.500K</b>	104240	83	102	103213	119	99	105696	32	44
							105695	13	18

Custom Color and Power Solutions  
 Can be manufactured upon request

**Packaging Details**      Chain      Bag      Box  
 50 pcs      100 pcs      1,000 pcs

Can Depth (cm)      ■ Optimal      ■ Acceptable

Density Guideline	1"	2"	3"	4"	5"	6"	7"	8"	9"	10+"
<b>SLIM</b>	<span style="color: lightgreen;">■</span>	<span style="color: green;">■</span>	<span style="color: green;">■</span>	<span style="color: green;">■</span>	<span style="color: green;">■</span>	<span style="color: green;">■</span>	<span style="color: green;">■</span>	<span style="color: green;">■</span>	<span style="color: green;">■</span>	<span style="color: green;">■</span>
<b>SLIM HO</b>	<span style="color: green;">■</span>	<span style="color: green;">■</span>	<span style="color: green;">■</span>	<span style="color: green;">■</span>	<span style="color: green;">■</span>	<span style="color: green;">■</span>	<span style="color: green;">■</span>	<span style="color: green;">■</span>	<span style="color: green;">■</span>	<span style="color: green;">■</span>

Luminous flux tolerance ±10% - CCT tolerance ±8%

