



TMT LEDs USA LLC
Irving, Texas 75063 USA
info@tmtledsusa.com
usa.tmtleds.com

Datasheet
Game Player
TDS-TMT 3
(Midi 3)

IP 67
PROTECTION

MADE IN
EUROPE

7 YEAR
PRODUCT WARRANTY

5 YEAR
LABOR WARRANTY

UL
E491014

CE

TMT 3 LED Module



The TMT LEDs Game Player TMT 3 module is designed for use in medium to large channel letters and sign cabinets. The advanced CrystaLens optics have a viewing angle of over 180° that expands the coverage of the light dispersion over a larger area, minimizing the number of modules per sign than competing products. All of the Midi Series modules are compatible with the game changing Midi Stick with the revolutionary snap in technology. No need to tape it, screw it or glue it, just snap it and go! Midi Series modules include the unique Cable Hiding Technology that allows installers to adjust the spacing between modules, securing excess wire behind the module without needing separate holders, clips or silicone."

Features

- 146-225 Lumens per module
- Cable Hiding Technology (Patent Pending)
- Energy efficient circuit design (Patent Pending)
- Clean White Technology
- Snap-in compatible o TMT LEDs aluminum Midi Stick (Patent Pending)
- Up to 113 lumens per watt

Applications

- Ideal for larger channel letters with depths of 2"-6"
- Perfect for sign cabinets with installation depths of 2" to 6" from sign face



TMT LEDs USA LLC
Irving, Texas 75063 USA
info@tmtledsusa.com
usa.tmtleds.com

Datasheet Game Player TDS-TMT 3 (Midi 3)



Operating Temperature	-40°F ~ +140°F	Lead Wire	Tin Coated Copper Wire
Storage Temperature	-40°F ~ +140°F	Lifetime TM21	>60,000 Hours
Body Material	Case: ABS Optics: Optical PC	Adhesive Tape	3M Foam
Finishing	Ultrasonic Welding	Strip Size	50 Modules/Strip

CONSTANT CURRENT

12V DC

3 SDCM

160° BEAM ANGLE

Product Name	Order Code	Power	C2C	Lumens	Lm/W	Color
TMT Midi 3 12V 1.5W 6,500K	TMT-104244	1.5W	8"	225	150Lm/W	6,500K

Packaging Details

Chain

Bag

Box

50 pcs

100 pcs

1.000 pcs

Can Depth (cm)

Optimal

Acceptable

Density Guideline

1"

2"

3"

4"

5"

6"

7"

8"



9"

10+"

TMT 3



Luminous flux tolerance ±10% - CCT tolerance ±8%

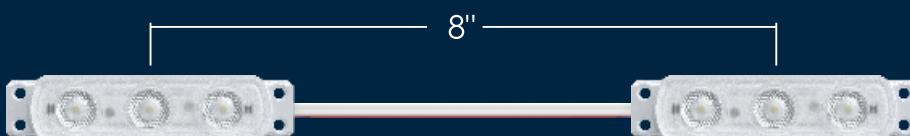

BEAM ANGLE

